

532,588

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



Rec'd PCT/PTO 25 APR 2005




(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/037339 A1

- (51) International Patent Classification⁷: A61M 39/10, 3/02
- (21) International Application Number:
PCT/DK2003/000720
- (22) International Filing Date: 23 October 2003 (23.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2002 01610 23 October 2002 (23.10.2002) DK
- (71) Applicant (for all designated States except US): COLOPLAST A/S [DK/DK]; Holtedam 1, DK-3050 Humlebæk (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): JENSEN, Lars, Bøgelund [DK/DK]; Dæmningen 65, 1, DK-2610 Roedovre (DK). SOERENSEN, Anette [DK/DK]; Haraldsgade, 100, 3th, DK-København Ø (DK).
- (74) Common Representative: COLOPLAST A/S; Holtedam 1, DK-3050 Humlebæk (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COUPLING DEVICE

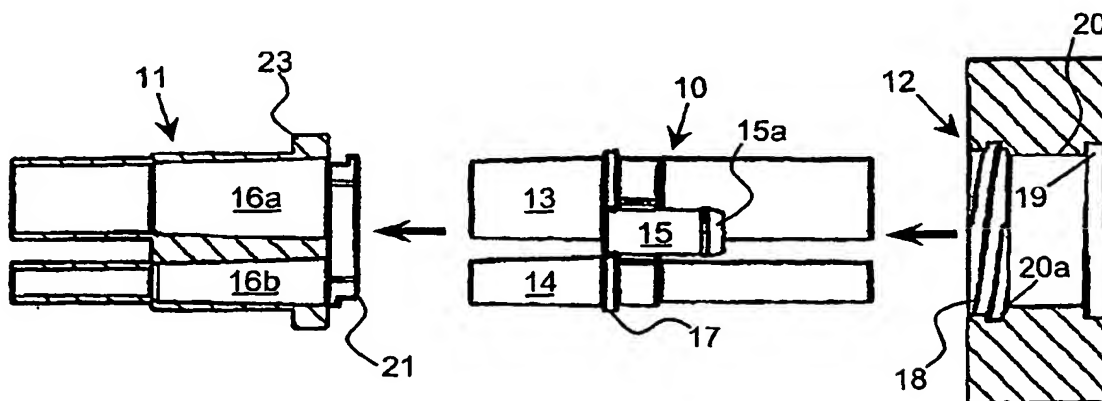

(57) Abstract: The coupling device (9) comprises a first connector part (10) and a second connector part (11), the connector parts (11, 10) comprising connecting portions (16a, 16b, 13, 14) for engagement with corresponding connecting portions (16a, 16b, 13, 14) of the other connector part (11, 10). A disengagement means (12) is provided for assisting in disengaging the engagement between the connecting portions (13, 14, 16a, 16b).

WO 2004/037339 A1

TITLE

Coupling Device

BACKGROUND OF THE INVENTION**5 1. Field of the Invention**

The present invention relates to a coupling device comprising a first connector part and a second connector part, each connector part comprising at least one connecting portion for engagement with at least one corresponding connecting portion of the other connector part, a disengagement means being provided for at
10 least assisting in disengaging the engagement between said connecting portions.

2. Description of the Related Art

Disabled persons, such as persons having a spinal cord injury or spina bifida or MS, with limited limb movement can often not perform their normal bowel function
15 without the need for outside aids. Examples of such aids are drugs, digital stimulation, massage or colonic irrigation. Disabled persons are often unable to perform these procedures without help from another person.

One irrigation system is the arrangement disclosed in Applicant's Danish
20 application No. PA 2002 01096, in which a reservoir is filled with irrigating liquid to a predetermined level. The reservoir is formed as a substantially sealed container and is connected with a probe for arrangement in a user by means of a conduit means.

25 The probe comprises a shaft portion and a fixation member for fixation in rectum in the form of an inflatable cuff. The inflatable cuff is connected with a tube for conducting an inflating medium to the cuff. The other end of the first part of the conduit means is connected with a control unit.

30 Generally, irrigation is carried out by inflating the cuff in order to secure the probe in position in the user, sealing against leakage, and subsequently feeding irrigating liquid from the reservoir through a tube to the probe by means of a

pump.

Portability of equipment is extremely important to the user and this irrigation system may readily be transported by disabled persons. However, easy
5 preparation of the irrigation system is also of great importance to such persons if they are to be able to use the irrigation system without aid from an assisting person.

10 In the irrigation system described above, the disposable probe is to be used once and subsequently discarded. Therefore, the user must connect and disconnect the probe from the two tubes leading to the control unit each time he or she uses the irrigation system. The irrigation system may e.g. be provided with two luer type connectors such as the luer locks disclosed in US Patent No. 6,428,515 and
15 US Patent No. 5,620,427 connecting the probe with the tubes leading to the control unit.

The male luer lock connector of a single luer lock is traditionally inserted into the female luer lock connector by pressing them together and is removed by pulling and rotating the connectors in opposite directions in a wriggling motion.
20 Disconnection by just pulling the connectors in opposite directions is normally difficult to a non-disabled person, respectively extremely difficult to a disabled person.

Therefore, as is well known in the art, an engagement means in the form of a nut or a sleeve as disclosed in US Patent No. 5,620,427 is mounted on the male luer connector, the engagement means being threaded on a corresponding
25 engagement means disposed on the female luer lock connector, thereby enabling disconnection of the male luer lock connector from the female luer lock connector through a rotating operation that requires less strength and is more
30 manageable than pulling the parts in opposite directions. Also, use of such engagement means facilitates connecting the luer lock connectors. Thus, by use of this method a disabled person is more likely to readily be able to

connect/disconnect the probe from the tubes leading to the control unit.

However, when two tubes are arranged with small spacing as is the case in the present irrigation system, neither of the two above mentioned

5 connecting/disconnecting methods are applicable since individual rotation of the tubes is not possible. The remaining option is to pull the connectors in opposite directions (though a small amount of wriggling could be possible) and thus, for a disabled person it is extremely difficult to connect and especially disconnect the two luer lock connectors.

10

From US Patent No. 3,747,632 is disclosed a multiple tubes coupling system, comprising two parts to be connected, and a ring for securing the two parts to each other's. The ring may also ease disconnection. The two parts are in the form of cylindrical portions with teeth for engaging with the ring on the surface of
15 the portions. However, the presence of these teeth on the outer surface of the portions makes the coupling rather bulky, as well as the teeth may cling to clothes etc.

In the field of medical couplings it is often desired to have the coupling as
20 compact as possible. However, the size of the coupling is usually dictated by the size and amount of tubes to be connected, as well as the means for connection often take up place too.

Thus, there is still a need for a coupling device having a minimum size and being
25 easy to use.

SUMMARY OF THE INVENTION

With this background it is an object of the present invention to provide a coupling device that is easy to use.

30

This object is met by means of a coupling device comprising a first connector part and a second connector part, each connector part comprising at least one

connecting portion for engagement with at least one corresponding connecting portion of the other connector part, a disengagement means being provided for at least assisting in disengaging the engagement between said connecting portions and each connector part, the device comprising at least two connecting portions, 5 the disengagement means being connected with the first connector part and comprising engagement means for engagement with corresponding engagement means on the second connector part, the second connector part comprises a disk including a through-going hole in connection with each corresponding connecting portion, the engagement means of said connector part being provided on said 10 disk, the engagement means of the disengagement means comprising internal threads and the engagement means of the second connector part comprising external threads, and wherein the holes in the disk of the second connector part are arranged with a small spacing, and in which the external threads of the engagement means of the second connector part comprise at least one recess.

15 By incorporating a plurality of connecting portions in each connector part, the user is able to connect and disconnect the tubes by himself or herself and thus, e.g. with the irrigation system disclosed in Applicant's Danish application No. PA 2002 01096, to perform the entire irrigation without the need for outside help.

20 The disengagement means is intended for connection with the first connector part and comprises engagement means for engagement with corresponding engagement means on the second connector part. The second connector part may comprise a disk including a through-going hole in connection with each 25 corresponding connecting portion, the engagement means of said connector part being provided on said disk. The engagement means of the disengagement means may comprise internal threads corresponding to external threads of the engagement means of the second connector part. This provides for a simple and reliable operation of the coupling device, as the connector parts are pulled 30 towards and away from each other when connecting and disconnecting the connector parts.

The through-going holes in the disk of the second connector part are arranged with a small spacing, and/or the external threads of the engagement means of the second connector part comprise at least one recess. In this way, the overall size of the coupling device may be reduced and a particularly compact design of the coupling device is achieved, which, i.a., makes the coupling device inexpensive in manufacture. However, the external threads may also not comprise any recesses.

When referring to the through-going holes of the connector part, it is obvious that these holes may have any suitable configuration according to the design of the connector portions. E.g in the case that the connector portions are in the form of a luer-lock-type coupling, the phrase "through-going holes" may cover both the male and the female portion of the coupling.

In one embodiment of the invention the external threads of the engagement means of the second connector part may comprise two or more recesses. The presence of the recesses in the external threads renders it possible to employ the recess area by having at least one of the holes extending into the recess. By dragging the holes towards the edge of the disk in the recess area the area of the disk is utilised to a maximum, and the overall size of the coupling device may be further reduced.

In a further embodiment, the engagement means comprises a bayonet coupling including at least one track in the disengagement means and at least one projection on the second connector part, said at least one track including at least one portion extending obliquely with respect to the axial direction of the disengagement means.

In another embodiment, at least some of said connecting portions have such an axial extension that the first and the second connector parts are brought into connection with each other before activation of the disengagement means, thus, engaging in a loose connection, allowing the user to let go of the disengagement

means and subsequently get a firmer grip of the disengagement means, the purpose being to enable the user to more readily rotate the disengagement means to connect and/or disconnect the first connector part with the second connector part.

5

In yet another embodiment, the disengagement means comprises handle means to ease the rotating operation of the disengagement means when connecting the first connector part with the second connector part and during the disconnecting operation.

10

In a further embodiment, the first connector part comprises two male luer lock connecting portions and the second connector part comprises two female luer lock connecting portions.

15

In another embodiment, each connector part may be provided with more than two connecting portions. Furthermore, the disengagement means may be mounted on the second connector part, and the design of the connecting portions may be varied, as it is e.g. conceivable to have one female and one male luer lock connector on each connector part.

20

In another aspect of the invention, a probe incorporating the first or the second connector part of a coupling device is provided. Either the male or the female luer lock connector may be attached to the probe.

25

In yet another aspect of the invention, a method of disengaging the engagement between a first and a second connector part of a coupling device is provided.

Other features and advantages will readily be appreciated from the following description of examples of embodiments.

30

Brief Description of the Drawings

In the following the invention will be described in further detail with reference to the schematic drawings, in which

- Fig. 1 shows an irrigation system, which is not as such a part of the invention,
5 incorporating a probe and a coupling device according to the present invention,
Fig. 2 is an exploded sectional view of an embodiment of a coupling device according to the present embodiment,
Fig. 3 is a sectional view of a disengagement means attached to a first connector part,
10 Fig. 3a is a sectional view of an assembled coupling device,
Fig. 4 is a perspective view of a second connector part,
Fig. 5 is a perspective view of the first connector part, and
Fig. 6 is a perspective view of the disengagement means.

15 Description of the Preferred Embodiments

- In Fig. 1, an irrigation system is shown, in which a reservoir 1 is filled with irrigating liquid 2 to a predetermined level. The reservoir 1 is formed as a substantially sealed container and is connected with a probe 3 for arrangement in a user by means of a conduit means in a manner that will be described in further
20 detail in the following.

- The probe 3 comprises a shaft portion 4 and a fixation member in the form of an inflatable cuff 5. The inflatable cuff 5 is connected with a tube 6 for conducting an inflating medium to the cuff. The probe 3 is furthermore connected with a tube 7
25 for conducting irrigating liquid. The other ends of the first tubes 6, 7 are connected with a control unit 8. Generally, irrigation is carried out by inflating the cuff 5 in order to secure the probe 3 in position in the user, and subsequently feeding irrigating liquid 2 from the reservoir 1 to the probe 3 by means of a pump 8a.

30

Fig. 2 shows an embodiment of the coupling device 9 comprising a first connector part 10, a second connector part 11, and a disengagement means 12, the

coupling device 9 connecting the probe 3 with the gas conducting tube 6 and the liquid conducting tube 7. In this embodiment of the present invention, the first connector part 10 is provided with two tapered conical portions 13, 14, whereas the second connector part is provided with two corresponding tapered bores 16a, 16b. The connecting portions, i.e. the portions 13, 14 and the bores 16a, 16b may be conical as suggested in the embodiments shown in the drawings, or they may be non-circular, e.g. polygonal, in section. Also, they may have a constant or a varying cross-section and they may have arched as well as rectilinear engagement surfaces. In the present embodiment, the portions 13, 14 and the bores 16a, 16b together constitute two luer lock connectors for connecting the probe 3 with the tubes 6, 7.

Fig. 3 shows the disengagement means 12 attached to the first connector part 10. Before use of the coupling device 9, the disengagement means 12 in the form of a sleeve or a nut is mounted on the first connector part 10. The disengagement means 12 is kept in place on the first connector part 10 and is rotatably mounted by means of a shoulder portion 17 and a resilient member 15 in such a way that the disengagement means 12 engages with the first connector part 10 by moving the disengagement means 12 in the direction shown in Fig. 2, the disengagement means 12 sliding over a projection 15a of the resilient member 15, the projection 15a of the resilient member 15 being pushed slightly inwards during this movement, and, subsequently, the projection 15a moving outwards into engagement with a stepped portion 19 of the disengagement means 12. At the opposite end of the disengagement means 12, an engagement means 18 is provided between a central portion 20 and the end of the disengagement means 12. The engagement means 18 of the disengagement means 12 has such dimensions that a step 20a is formed at the transition to the central portion 20. The step 20a abuts on the shoulder portion 17 on the first connector part 10. In the present embodiment, the engagement means 18 of the disengagement means 20 is provided in the form of internal threads 18.

Fig. 3a shows the assembled coupling device 9.

Fig. 4 is a perspective view of the second connector part 11. In the present embodiment, a disk 23 disposed at the end of the second connector part 11 facing the first connector part 10 has a circular shape, thereby allowing the attachment of an engagement means 21 to also have a circular shape. Therefore, engagement means can be implemented through which a rotatable and consequently much less physically demanding mounting of the first connector part 10 on and dismounting of this connector part from the second connector part 11 is possible.

Holes 26, 27 are provided in the circular disk 23 of the second connector part 11 in order to enable flow through the coupling device 9. In the embodiment of Fig. 4, said holes 26, 27 are arranged with a small spacing, e.g. less than 10%, preferably 7% or less of the diameter of the disk (i.a. dependent on the thickness of the tube walls), and furthermore a recess 25 is disposed in the engagement means 21 of the second connector part 11 to make room for the holes 26, 27. This provides the advantage of a reduction in size of the circular disk 23 of the second connector part resulting in an overall smaller size of the coupling device 9.

Fig. 5 is a perspective view of the first connector part 10, whereas Fig. 6 is a perspective view of the disengagement means 12. Similar to the second connector part 11, a circular disk 24 is provided at the end of the first connector part 10 facing the second connector part 11, allowing the mounting and rotation of the also circular disengagement means 12 on the first connector part 10.

When the disengagement means 12 is attached to the first connector part 10, the engagement means 18 of the disengagement means 12 corresponds to engagement means 21 of the second connector part 11. In the present embodiment, the engagement means 21 of the second connector part 11 is provided in the form of external threads 21. In an embodiment (not shown), the engagement means of the second connector part 11 and the disengagement

means 12 is provided in the form of a bayonet coupling, e.g. including one track portion extending obliquely with respect to the axial direction of the disengagement means and a projection, e.g in the form of a pin member on the second connector part.

5

Thus, when connecting the first connector part 10 with the second connector part 11, the connection portions on the first connector part 10 engage into the second connector part 11 through a rotating operation of the disengagement means, thereby allowing the connecting portions 13, 14 of the first connector part 10 to
10 more readily be properly connected and/or disconnected with the connecting portions 16a, 16b of the second connector part 11.

In the embodiment shown in the drawings, the disengagement means 12 is provided with handle means 22 to ease the rotating operation of the
15 disengagement means 12 when connecting the first connector part 10 with the second connector part 11 and during the disconnecting operation.

Alternatively, the first connector part 10 and the second connector part 11 may be initially brought together before engagement of the engagement means 21 of the
20 first connector part in the engagement means 21 of the second connector part, the first connector part 10 and the second connector part 11 thus engaging in a loose connection, allowing the user to let go of the disengagement means 12 and subsequently get a firmer grip of the disengagement means 12, the purpose
25 being to enable the user to more readily rotate the disengagement means to connect and/or disconnect the first connector part 10 with the second connector part 11.

The invention should not be regarded as being limited to the embodiment shown and described in the above but various modifications may be carried out without
30 departing from the scope of the claims.

For instance, each connector part may be provided with more than two connecting portions. Furthermore, the disengagement means may be mounted on the second connector part, and the design of the connecting portions may be varied, as it is e.g. conceivable to have one female and one male luer lock connector on each connector part. Also, either the male or the female luer lock connector may be attached to the probe 3.

The connecting portions 16a, 16b, 13, 14 are not necessarily of a luer lock type, they may instead include two disks, each with two holes and further, each hole may be enclosed by sealing members. In such a design, the holes may be pushed together and sealed by activating the disengagement means.

Alternatively, the disengagement means 12 the disengagement means is e.g. applied only when disconnecting the first connector part 10 from the second connector part 11. Thus, the first connector part 10 and the second connector part 11 may be engaged into each other by just pushing the two connector parts 10, 11 into each other, without activating the engagement means 21, 18. However, as in the embodiments described above, the first connector part 10 and the second connector part 11 are disengaged by activating the disengagement means. This alternative provides for a faster assembly of the coupling device 9, the user still being able to readily disengage the first connector part 10 from the second connector part 11.

As a further alternative, the disengagement means may be formed integrally with the first or the second connector part, e.g. as an arm hingedly connected with the first or the second connector part and comprising a hook section engaging the other connector part. By activating the arm, the first and the second connector parts are substantially pulled out of each other.

Furthermore, the coupling device 9 is not limited to use in the coupling between the probe 3 and the tubes 6, 7 but may also be applied in other couplings of the

irrigation system, e.g. in the coupling between the tubes and the control unit or between the tubes and the reservoir.

Claims

1. A coupling device (9) comprising a first connector part (10) and a second connector part (11), each connector part (11, 10) comprising at least one connecting portion (16a, 16b, 13, 14) for engagement with at least one
5 corresponding connecting portion (16a, 16b, 13, 14) of the other connector part (11, 10), a disengagement means (12) being provided for at least assisting in disengaging the engagement between said connecting portions (13, 14, 16a, 16b) and each connector part (11, 10), the device comprising at least two
10 connecting portions (13, 14, 16a, 16b), the disengagement means (12) being connected with the first connector part (10) and comprising engagement means for engagement with corresponding engagement means on the second connector part (11), the second connector part (11) comprising a disk (23) including a through-going hole (26, 27) in connection with each corresponding connecting
15 portion (16a, 16b), the engagement means of said connector part being provided on said disk (23), the engagement means of the disengagement means (12) comprising internal threads (18) and the engagement means of the second connector part comprising external threads (21), and wherein the holes (26, 27) in the disk (23) of the second connector part (11) are arranged with a small
20 spacing, and in which the external threads (21) comprise at least one recess (25).
2. A coupling device (9) according to claim 1 wherein the external threads (21) of the engagement means of the second connector part (11) comprises two or more recesses (25).
- 25 3. A coupling device (9) according to claim 1 or 2 wherein at least one of the through-going holes (26, 27) is extending into the recess (25).
4. A coupling device (9) according to any one of the preceding claims in which the engagement means (18, 21) comprises a bayonet coupling including at least
30 one track in the disengagement means (12) and at least one projection on the second connector part (11), said at least one track including at least one portion extending obliquely with respect to the axial direction of the disengagement

means.

5 5. A coupling device (9) according to any one of the preceding claims, in which at least some of said connecting portions (16a, 16b, 13, 14) have such an axial extension that the first and the second connector parts (11, 10) are brought into connection with each other before activation of the disengagement means (12).

10 6. A coupling device (9) according to any one of the preceding claims, in which said disengagement means (12) comprises handle means (22).

7. A coupling device (9) according to any one of the preceding claims, in which the first connector part (10) comprises two male luer lock connecting portions (13, 14) and the second connector part comprises two female luer lock connecting portions (16a, 16b).

15 8. A probe (3) for an irrigation system, comprising a first connector part (10) or a second connector part (11) of a coupling device (9) according to any one of the claims 1 to 9.

20 9. A method of disengaging the engagement between a first and a second connector part (10, 11) of a coupling device (9) according to any one of the claims 1 to 9, wherein said disengagement means (12) is activated in such a way that the first and the second connector parts are substantially pulled out of each other.

25

1/1

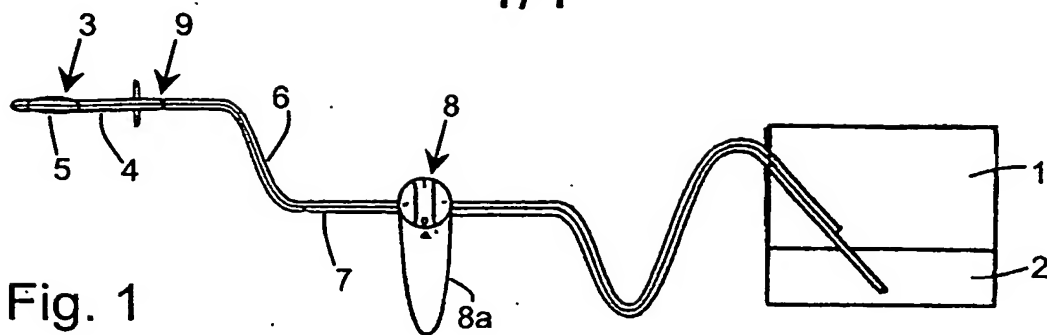


Fig. 1

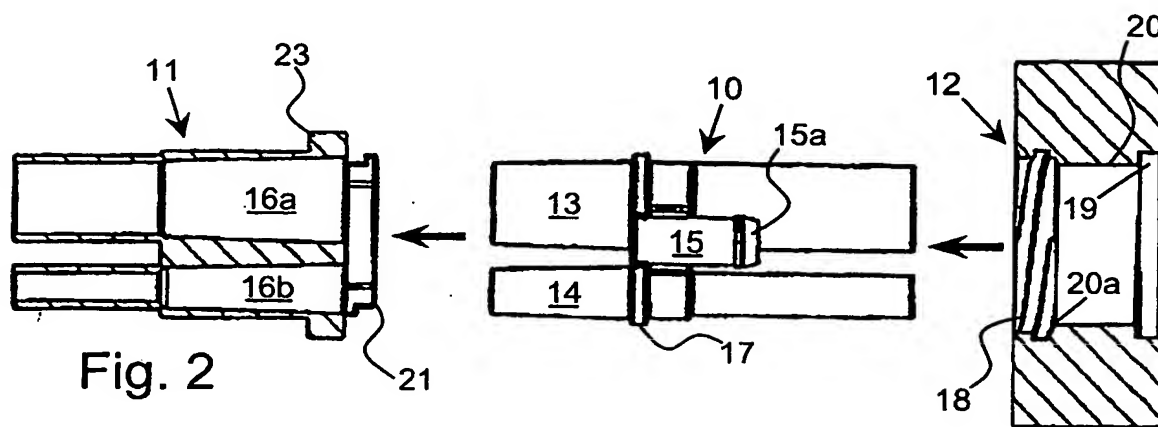


Fig. 2

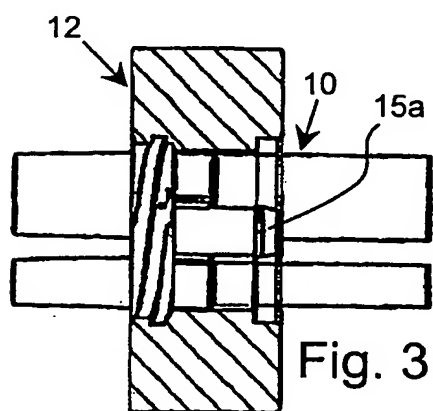


Fig. 3

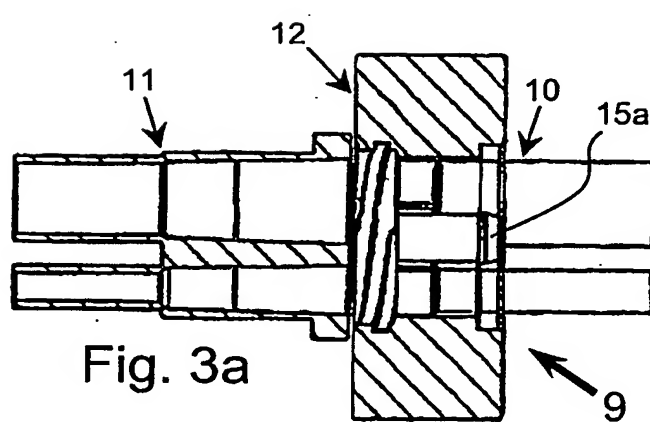


Fig. 3a

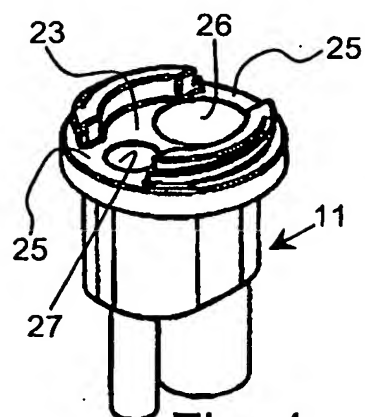


Fig. 4




Fig. 5

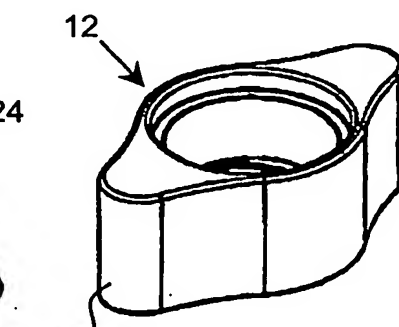


Fig. 6

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/DK 03/00720

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M39/10 A61M3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61M F16L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 747 632 A (KOK A ET AL) 24 July 1973 (1973-07-24) column 2, line 35 -column 3, line 60; figures 1,2	1-3,9
Y	US 4 701 159 A (TAI HENRY T ET AL) 20 October 1987 (1987-10-20) column 3, line 8 -column 5, line 9; figures 1-4	1,5-7,9
Y	US 2002/115984 A1 (GUALA GIANNI) 22 August 2002 (2002-08-22) page 3, paragraph 39; figures 1-7	1,5-9
Y	DE 42 18 119 A (TUCHENHAGEN OTTO) 11 April 1996 (1996-04-11) the whole document	8
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

21 January 2004

Date of mailing of the international search report

29/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schönleben, J

INTERNATIONAL SEARCH REPORT

International Application No

/DK 03/00720

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 487 434 A (ROCHE JOSEPH R) 11 December 1984 (1984-12-11) column 2, line 64 -column 4, line 17; figures 1,2 ----	1,6,7,9
A	WO 01 34223 A (KCI MEDICAL LTD ;HEATON KEITH PATRICK (GB)) 17 May 2001 (2001-05-17) page 6, line 4 -page 7, line 20; figures 1-6 ----	1,4-6,9
A	DE 37 05 339 A (SIEMENS AG) 1 September 1988 (1988-09-01) abstract; figure 1 -----	8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 03/00720

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3747632	A	24-07-1973	CH 522844 A	15-05-1972
			CH 537552 A	31-05-1973
			DE 2112210 A1	04-11-1971
			FR 2084606 A5	17-12-1971
			GB 1324906 A	25-07-1973
US 4701159	A	20-10-1987	US 4581012 A	08-04-1986
			EP 0185977 A1	02-07-1986
US 2002115984	A1	22-08-2002	IT T020010140 A1	16-08-2002
			EP 1236481 A1	04-09-2002
DE 4218119	A	11-04-1996	DE 4218119 A1	11-04-1996
US 4487434	A	11-12-1984	NONE	
WO 0134223	A	17-05-2001	AU 1163901 A	06-06-2001
			BR 0015460 A	12-11-2002
			CA 2390513 A1	17-05-2001
			CN 1420792 T	28-05-2003
			EP 1227853 A1	07-08-2002
			WO 0134223 A1	17-05-2001
			GB 2356148 A	16-05-2001
			JP 2003513715 T	15-04-2003
			ZA 200203608 A	05-12-2002
DE 3705339	A	01-09-1988	DE 3705339 A1	01-09-1988